Scope of CTE Widening Project

Between Bukit Timah Road and Balestier Road/Moulmein Road

- Road widening stretching for 1.5 km between Bukit Timah Road and Balestier Road/Moulmein Road
- Widening of existing Kampong Java Flyover and Moulmein Flyover
- Provision of an exclusive new slip road from Bukit Timah Road to Moulmein Road
- Drainage works

Between Braddell Road and Ang Mo Kio Avenue 1

- Road widening stretching for 1.2 km between Braddell Road and Ang Mo Kio Avenue 1
- Widening of existing Ang Mo Kio South Flyover
- Extension of bridge over canal and box culverts
- Drainage works and construction of retaining structures

Between Ang Mo Kio Avenue 1 and Ang Mo Kio Avenue 3 (Completed)

- Road widening stretching for 1.5km between Ang Mo Kio Avenue 1 and Ang Mo Kio Avenue 3
- Reconstruction of covered pedestrian overhead bridge complete with linkways
- Drainage works and construction of retaining structures

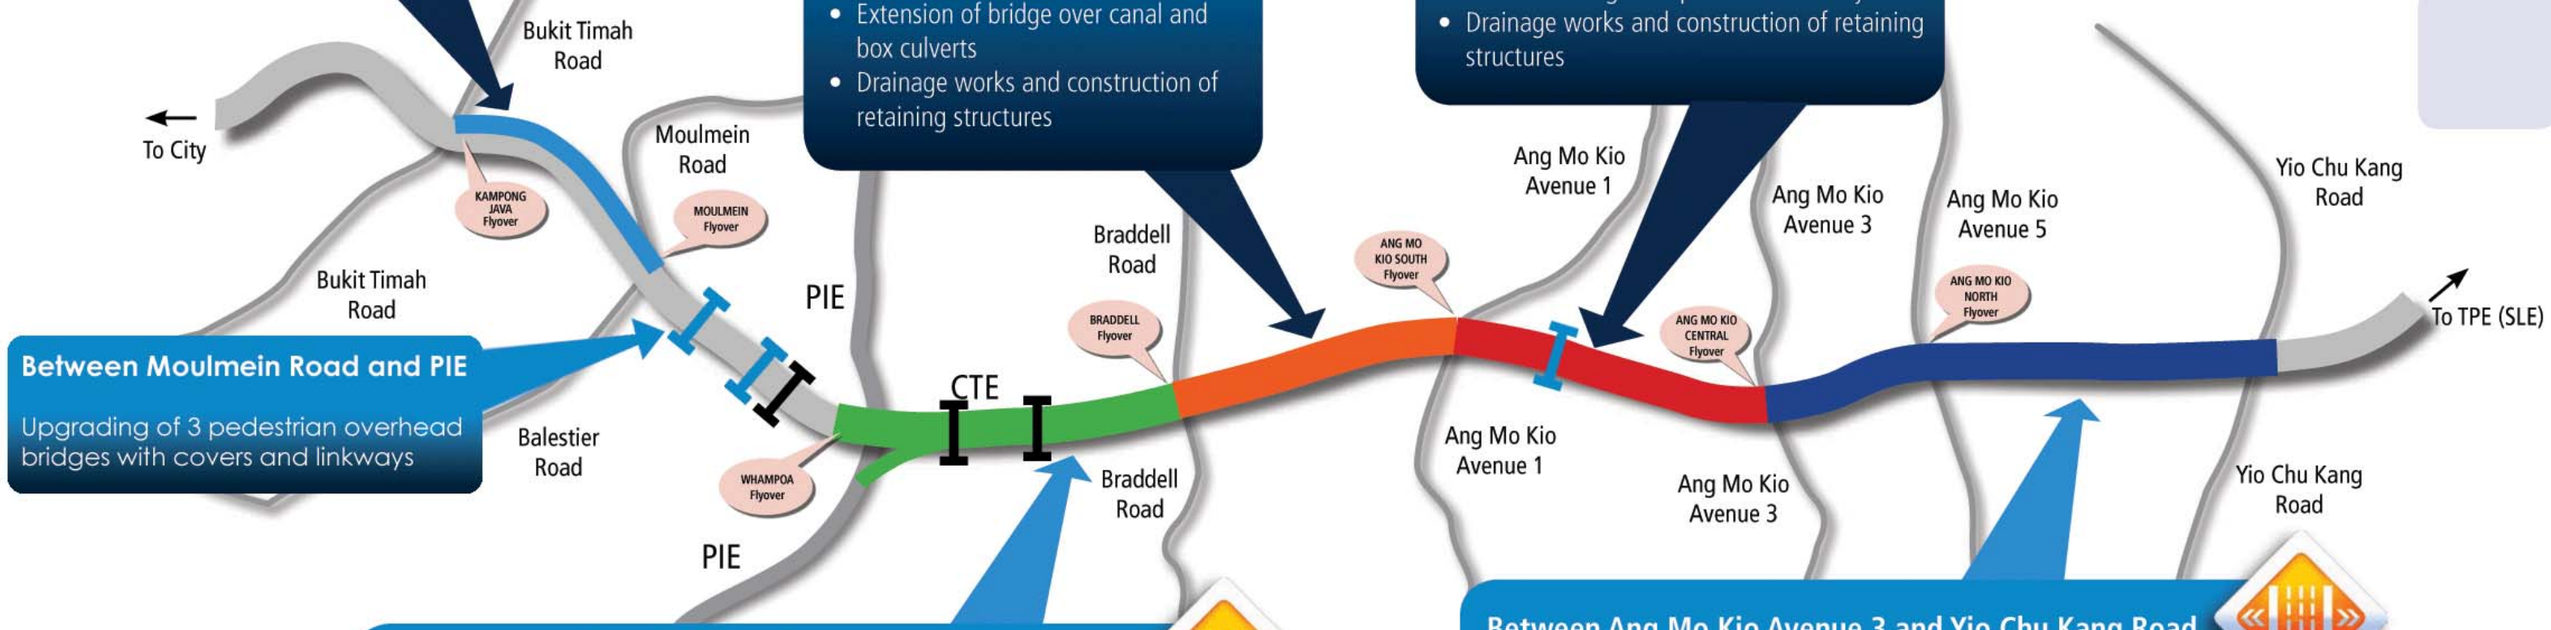

Between Moulmein Road and PIE

Upgrading of 3 pedestrian overhead bridges with covers and linkways

Between PIE and Braddell Road

- Road widening stretching for 2.4km between PIE and Braddell Road
- Widening of existing Whampoa Flyover and Braddell Flyover
- Widening of existing slip road structure to PIE
- Widening of bridge over Kallang River
- Construction of 2 new flyovers
- Reconstruction of 2 covered pedestrian overhead bridges complete with linkways
- Drainage works and construction of retaining structures

Between Ang Mo Kio Avenue 3 and Yio Chu Kang Road

- Road widening stretching for 2.6km between Ang Mo Kio Avenue 3 and Yio Chu Kang Road
- Widening of existing Ang Mo Kio Central Flyover and Ang Mo Kio North Flyover
- Construction of covered ramps to pedestrian underpass
- Drainage works and construction of retaining structures

Pedestrian overhead bridges (in progress)

Pedestrian overhead bridges (completed)